


SAFE HANDLING

SALLY Lifter

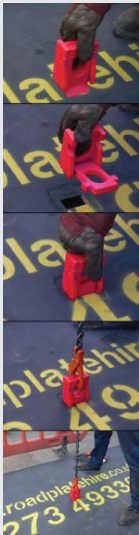

Use of SWIVEL ACTION, LOCK & LIFT YOLK (S.A.L.L.Y)

Always use appropriate P.P.E.
For use only with suitably socketed load units.

Open the swivelling section. This allows the jaws on the underside to narrow and drop into the centrally mounted hole in the load unit.

Once it is positioned in the hole, close the swivels. This opens the jaws and positively locks the SALLY into the load. It will remain locked in until the swivels are opened again.

You are now ready to connect a suitable lifting device. A shackle or safety hook for example.

Load units can now be lifted & positioned safely and efficiently.



TOSH-SALLY

The SALLY (Swivel Action Lock & Lift Yolk) is far and away the best way to handle road plates. Originally fitted to heavy duty and special versions, their winning features means they are being taken up in the general plate stocks of the national hire fleets.

- They are ultra simple to use, reliable and cost effective
- Rated up to the 4 t WLL.
- Available directly in the UK from RoadPlateHire

Everyone who has used them, loves them...

A.F, Works Manager, Ferrovial Agroman. London Heathrow Airport

"We will be using plates like this, with... the SALLY lifters, the only kind of plate to be used on BAA sites because we will incorporate them into the safe standards of work..."

J.H. Engineering Manager, Civil Engineering company, after using SALLY at London Gatwick Airport

"... our guys say the SALLY is a much better and faster way of handling road plates..."